





Diffuse reflective
Energetische reflexionslichttaster
Fotosens. tast. diretto fascio largo
Réflexion diffuse
Sensor fotoeléctrico tipo difuso reflectivo

	Output	Power supply voltage	Sensor Type	Sensing distance	Connector method
OM.E3Z-D86.OMS	PNP	12 to 24 VDC $\pm 10\%$	Diffuse - reflective	5 to 100 mm (wide view)	Connector type M8 4pin
OM.E3Z-D66.OMS	NPN				

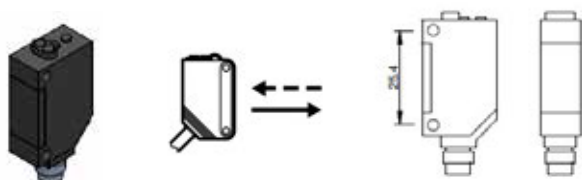


Laser Thin beam type (1 mm) reflective model
Laser Reflexionslichttaster mit engem Strahlkegel (1 mm)
Fotosens. tast. diretto fascio (1 mm)
Détection et positionnement précis
Sensor fotoeléctrico tipo thin beam (1 mm) modelo reflectivo

	Output	Power supply voltage	Sensor Type	Sensing distance	Connector method
OM.E3Z-LL86.OMS	PNP	12 to 24 VDC $\pm 10\%$	Laser Thin beam type reflective model	90 ± 30 mm	Connector type M8 4pin
OM.E3Z-L66.OMS	NPN				

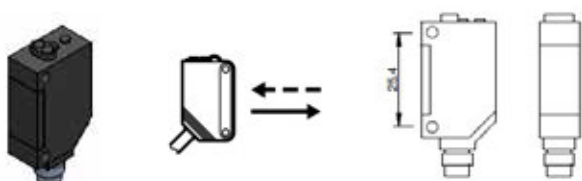


Distance-settable (Laser)
Hinter/Vordergrundausschaltung (Laser)
Fotosens. sopp. di sfondo regolabile
Distance réglable
Sensor fotoeléctrico tipo distance - settable

	Output	Power supply voltage	Sensor Type	Sensing distance	Connector method
OM.E3Z-LS86.OMS	PNP	12 to 24 VDC $\pm 10\%$	Distance-settable	30 to 200 mm	Connector type M8 4pin
OM.E3Z-LS66.OMS	NPN				

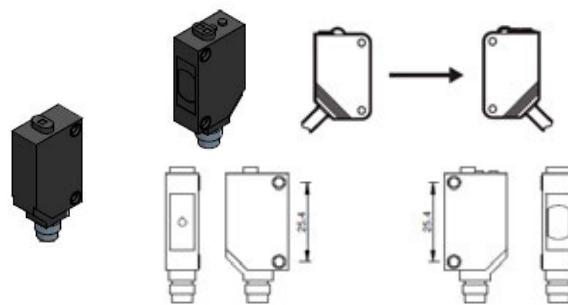


Through-beam laser 1 mm
Einweglichtschranke Laser 1 mm
Fotosens. spot 1 mm emett./ricev
Capteurs laser 1mm
Sensor fotoeléctrico tipo through-beam

	Output	Power supply voltage	Sensor Type	Sensing distance	Connector method
OM.E3Z-LT86	PNP	12 to 24 VDC $\pm 10\%$	Through-beam	15 m	Connector type M8 4pin
OM.E3Z-LT66.OMS	NPN				

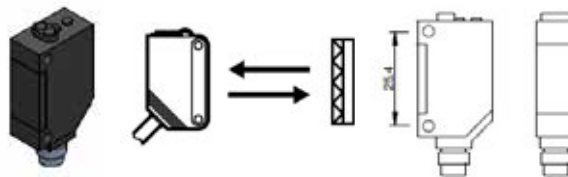


Retroreflective model
Reflexionslichtschranken
Fotosens. per catarinfrangente regol. fascio largo
Rétro réfléchissant
Sensor regulable para reflectores

	Output	Power supply voltage	Sensor Type	Sensing distance	Connector method
OM.E3Z-R86.OMS	PNP	12 to 24 VDC $\pm 10\%$	Retroreflective model	4 m	Connector type M8 4pin
OM.E3Z-R66.OMS	NPN				

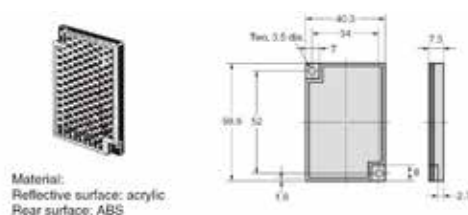


Reflector (order separately)
Rückstrahler
Catarinfrangente per sensori
Réflecteur
Reflector para sensor

OM.E39-R1S

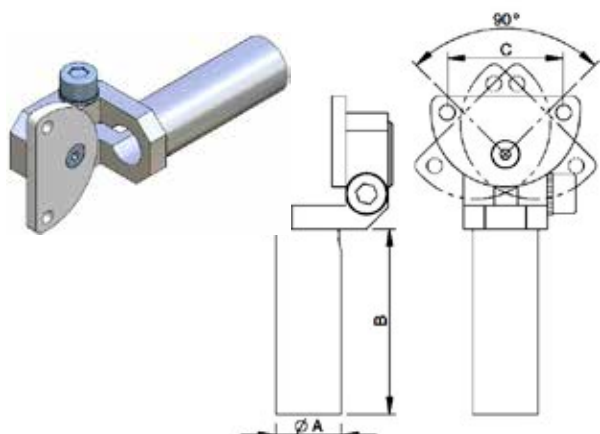


Adapter for Part Control
 Adapter für Teilekontrolle
 Staffa Snodata per Sensore
 Bras de Prise
 Estribo para Sensor

	A	B	C	
CA.ATK.10.10.30		30		23 g
CA.ATK.10.10.60	10	60		26 g
CA.ATK.10.10.90		90		29 g
CA.ATK.10.14.40		40	25	36 g
CA.ATK.10.14.80	14	80		44 g
CA.ATK.10.14.120		120		52 g

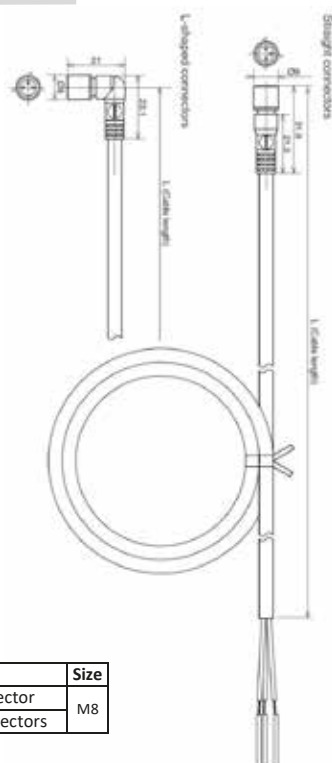


	Type	Size
OM.XS3F.M83S5M	Straight connector	M8
OM.XS3F.M83A5M	L - shaped connectors	

M8 Screw-on cable connectors 3 - wires
 Kabeldose gerade mit M8 Stecker, 3-polig
 Connettori femmina M8 assiali precablati 3 fili
 Capteurs inductifs M8 3 wires
 Juego de cables para conectores hembra M8 tipo PRO 3 pines

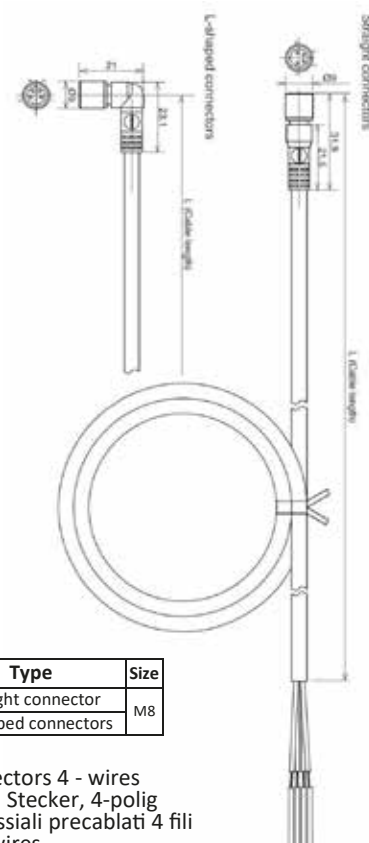

	Type	Size
OM.XS3F.M84S5M	Straight connector	M8
OM.XS3F.M84A5M	L - shaped connectors	

M8 Screw-on cable connectors 4 - wires
 Kabeldose gerade mit M8 Stecker, 4-polig
 Connettori femmina M8 assiali precablati 4 fili
 Capteurs inductifs M8 4 wires
 Juego de cables para conectores hembra M8 tipo PRO 4 pines

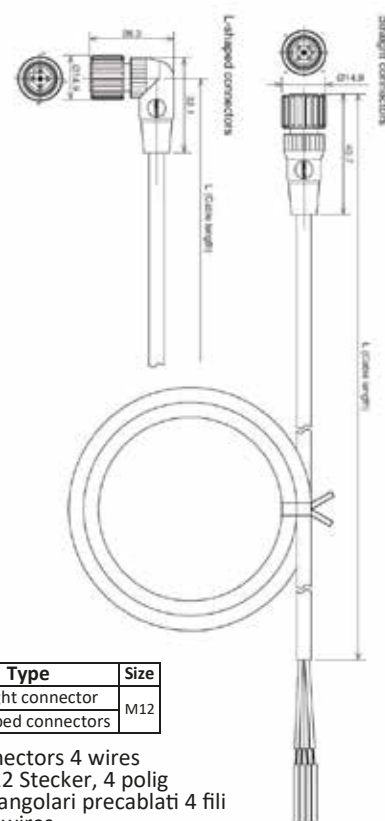


	Type	Size
OM.XS2F.M124S5M	Straight connector	M12
OM.XS2F.M124A5M	L - shaped connectors	

M12 Screw-on cable connectors 4 wires
 Kabeldose gerade mit M12 Stecker, 4 polig
 Connettori femmina M12 angolari precablati 4 fili
 Capteurs inductifs M12 4 wires
 Juego de cables para conectores hembra M12 tipo PRO 4 pines


Sensor
Sensor
Sensore
Capteur
Sensor



	Sensor with cable	
KT58PM8	3 wires electronic PNP normally Open M8 plug connector	4 g
KT58P3M	3 wires electronic PNP normally Open mt 3 cable	
KT58NM8	3 wires electronic NPN normally Open M8 plug connector	
KT58N3M	3 wires electronic NPN normally Open mt 3 cable	

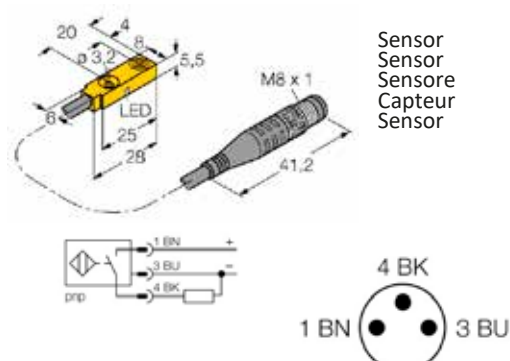


	Sensor with cable	
GRZ.20.SC.PNP	INDUCTIVE SENSOR PNP normally Open M8 plug connector	4 g
GRZ.20.SC.NPN	INDUCTIVE SENSOR NPN normally Open M8 plug connector	

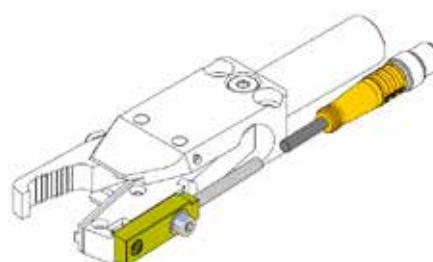


Sensor
Sensor
Sensore
Capteur
Sensor


	Sensor with cable	
KT38PM8	3 wires electronic PNP normally Open M8 plug connector	4 g
KT38P3M	3 wires electronic PNP normally Open mt 3 cable	
KT38NM8	3 wires electronic NPN normally Open M8 plug connector	
KT38N3M	3 wires electronic NPN normally Open mt 3 cable	

Sensor
Sensor
Sensore
Capteur
Sensor

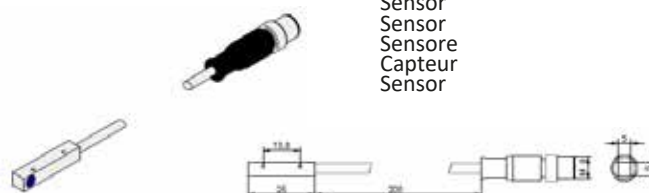

	Sensor with cable	
MMD.IL5AP3AVF80	INDUCTIVE SENSOR NPN normally Open M8 plug connector	4 g
MMD.IL5AN3AVF80		

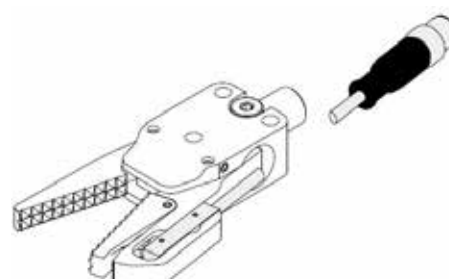


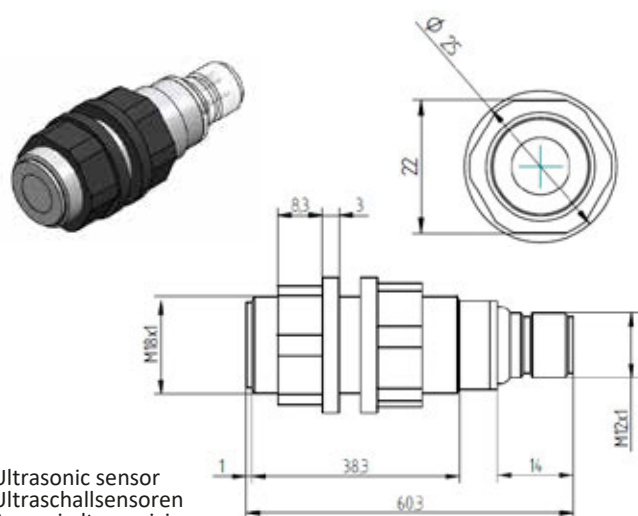

Ultrasonic sensor
Ultraschallsensoren
Sensori ultrasonici
Capteurs ultrasonores
Sensor ultrasónicos

	Output	Sensor Type	Sensing distance	Connector method	
MMD.UK6AHN0EUL	NPN	Ultrasonic sensor	40 mm	Connector type M12 4pin	65 g
MMD.UK6AHP0EUL	PNP				

CA.SCP

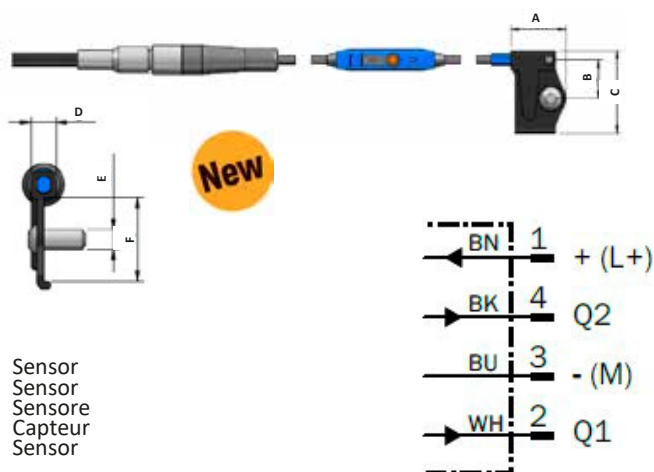


Sensor
Sensor
Sensore
Capteur
Sensor

	A	B	C	D	E	F
CA.SCP.1008	17	12	25	5	M4	18
CA.SCP.1012	20	16	32	6	M5	25

	Output	Sensor Type	Sensing distance	Connector method	
CA.SCP.1008	PNP	Magnetic sensor	0mm - 50mm	Connector type M8 4pin	65 g
CA.SCP.1012					


CA.SDS

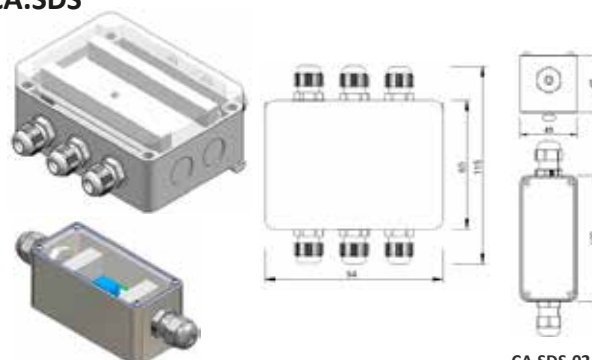


CA.SDS.02

Sensor Box
Klemmkasten für Sensoren
Scatola Derivazione Sensori
Boîte de Dérivation pour Capteurs
Caja de Conexiones Sensores

	Power supply	INputs	OUTputs
CA.SDS.02	24 V dc (+/- 10%)	Maximum 2 PNP, NPN or dry contact (NO or NC) sensor switched by jumper	1 up to 2 PNP, NPN or dry contact (NO or NC) outputs switched by jumpers
CA.SDS.04		Maximum 4 PNP, NPN or dry contact (NO or NC) sensor switched by jumper	1 up to 4 PNP, NPN or dry contact (NO or NC) outputs switched by jumpers
CA.SDS.06		Maximum 6 PNP, NPN or dry contact (NO or NC) sensor switched by jumper	1 up to 6 PNP, NPN or dry contact (NO or NC) outputs switched by jumpers
CA.SDS.08		Maximum 8 PNP, NPN or dry contact (NO or NC) sensor switched by jumper	1 up to 8 PNP, NPN or dry contact (NO or NC) outputs switched by jumpers

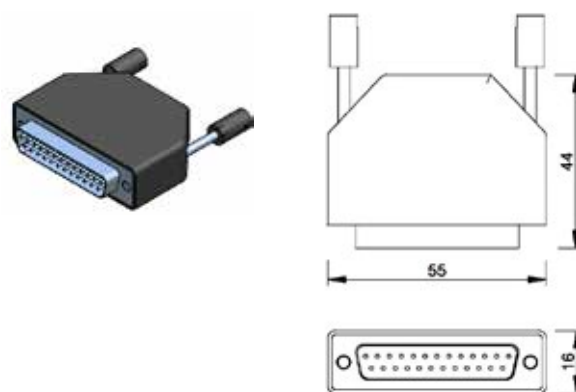

CA.19.03.001	25 pin M	10 g
--------------	----------	------

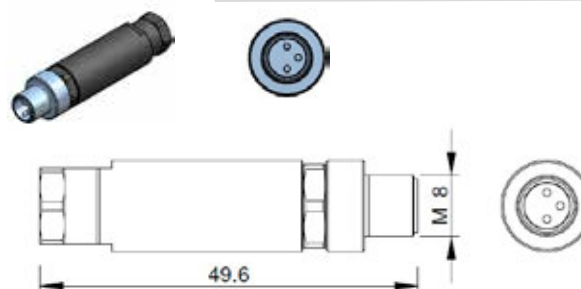

PAX.1501252	M8 3P M	15 g
-------------	---------	------